

# T-1000S Operating manual

**1、 T-1000S System features** 1、 32—256 Gray, Support software Gamma correction。

2、 Support the rules and special-shaped handle. 3、 Single-port output, can support 2048 lights。 4、 Off-line(SD Card) control, play back content stored in the SD card. 5、 T-1000S store a maximum of 16 programs, copy multiple files to the SD card in order,

after formatting the SD card as “FAT” format.

6、 The program must be named in orders . Ex. :00\_1.led, 01\_1.led, 02\_1.led.

7、 Compatible with single line or double line chips.

**NOTE:** 1. When T-1000S controller less than 512 pixels the frame rate can reach 30fps. When T-1000S control more than 512 pixels the frame rate will slow down automatically.

**2. T-1000S must use the new software LedEdit 2012.**

## 2、 Support chips:

Chip model	Control mode for software	Pixels(MA X )	Note
LPD6803,D705,1101,6909, 6912	T-1000-6803	2048 pixels	

LPD8806,LPD8809	T-1000-8806	2048 pixels	
TM1803, TM1804, TM1809, TM1812	T-1000-TM	2048 pixels	TM1804 and TM1809 are divided into high and low
TM1903 , TM1904 , TM1909, TM1912	T-1000-TM19	2048 pixels	
UCS6909 , UCS6912 , UCS7009, UCS5903	T-1000-UCS-32	2048 pixels	
UCS1903 , UCS1909 , UCS1912	T-1000-UCS- 256	2048 pixels	1903 and 1909 are divided into high and low
UCS3903	T-1000-UCS-1024	2048 pixels	
DMX512	T-1000-DMX	170/512 pixels	Compatible with standard DMX512
WS2801,WS2803	T-1000-WS	2048 pixels	
WS2811	T-1000-WS2811	2048 pixels	WS2811 be divided into high

			and low
DS189	T-1000-DS189	2048 pixels	
TLS3001,TLS3002 , TLS3008	T-1000-TLS	* pixels	
P9813	T-1000-P9813	2048 pixels	
SM16715	T-1000-SM16715	2048 pixels	SM16715 be divided into high and low
SM16716	T-1000-SM16716	2048 pixels	
BS0901,BS0902	T-1000-0901	2048 pixels	
BS0815	T-1000-0815	2048 pixels	

#### 4、Definition of printing： Definition of buttons：


Buttons	含义
保存 SET	Save Settings ( to save current settings file and the playback speed )。
模式 MODE	Change programs

速度 SPEED+	Speed up	Press speed+ and speed- on the same time the program will play circularly.
速度 SPEED-	Speed down	
DC5V	+5V power input	
GND	Power GND input	
7. 5-24V	+7.5-24V power input	
POWER	Power indicator	
ERROR	Error indicator	
SD 卡 SD CARD	SD card slot	

**TTL signal (245/spi signal) : RS485 signal.**

<b>CLK</b>	Clock signal	<b>B</b>	Signal A / DMX+
<b>DAT</b>	Data signal	<b>A</b>	Signal B / DMX-
<b>GND</b>	Signal ground	<b>GND</b>	Signal ground

**NOTE:** For the TTL(SPI) signal, the controller signal ground must connect to the LED ground directly.

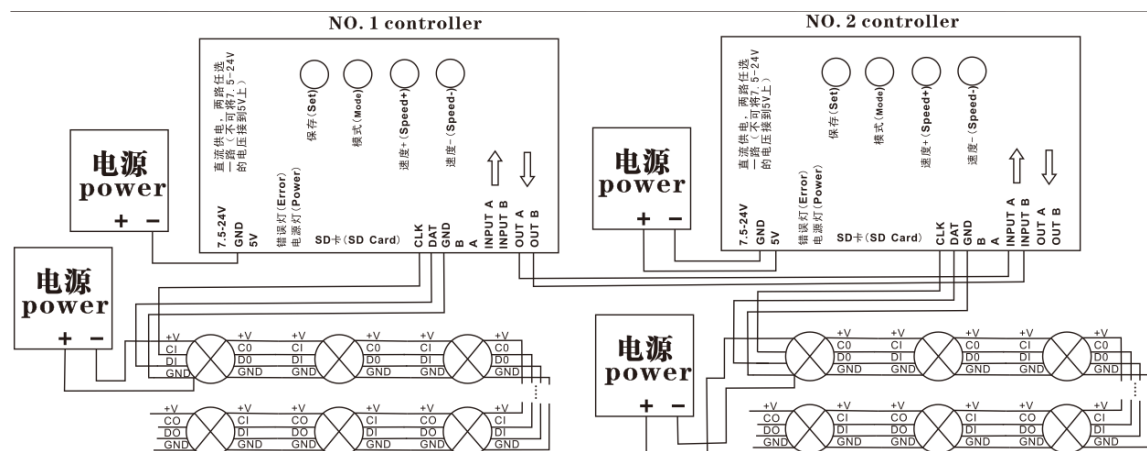

when the controller control less than 512 pixels the frame rate can reach 30fps,  
when control more than 512 pixels the frame rate will slow down automatically.

## 5、 Mode of connection

1. Multiple T-1000S controllers can be cascaded together and work synchronous.
2. T-1000S one TTL(SPI) signal and one RS485 signal port output, can control 2048 pixels;
3. When the chip for LED is single line chip just with data, then just need to be connected with DAT and GND of the controller. If the chip for LED is double line chip with DAT and CLK, then need to be connected with DAT, CLK, and GND of the controller.
4. If you need to use RS485 signal you need to connect controller A with LED A (DMX+), controller B with LED B(DMX-),
5. When you need to built a new project the controller type for the software is: T-1000-IC model.

## 6 – Name of the program

**The name for NO.2 controller:**

“00\_1.led” ----- NO.1 program for No.1 controller

“01\_1.led” ----- NO.2 program for No.1 controller

“02\_1.led” ----- NO.3 program for No.1 controller

“15\_1.led” ----- NO.16 program for No.1 controller


## The name for NO.2 controller:

“00\_2.led” ----- NO.1 program for No.2 controller

“01\_2.led” ----- NO.2 program for No.2 controller

“02\_2.led” ----- NO.3 program for No.2 controller

“15\_2.led” ----- NO.4 program for No.2 controller

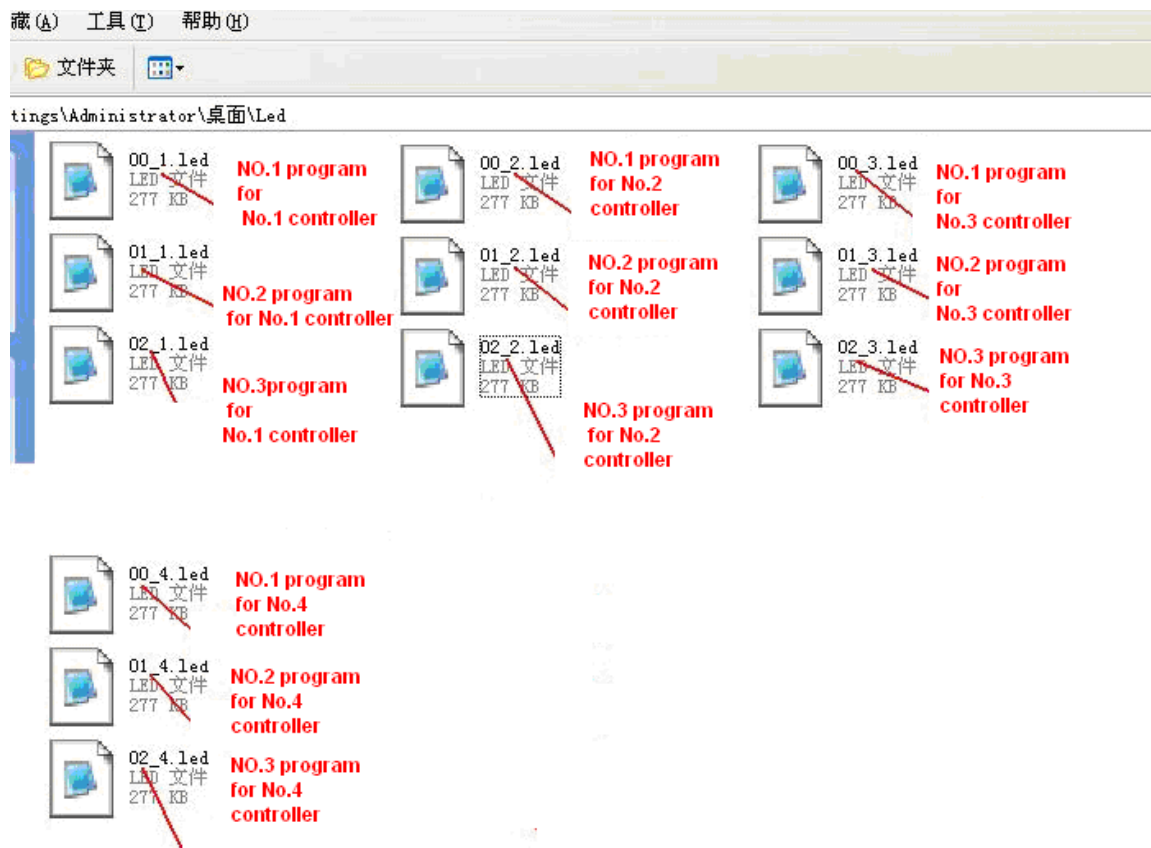

## 7、 Special parameters Memory card:

**Type:** SD card (suggest using high-speed SD card)

**Capacity:** 128MB—2GB

**Format:** FAT **Store file:** \*.led

**Physical parameters:** Working temperature : -30° C—85° C

Working power: 1W size: L165mm×W80mm×H30mm  
weight: 0.35KG signal port: 3pin connect port

**Attention:** Before copy files to SD card ,The SD card must be formatted as FAT format



The SD card in controller can not be hot-swappable, plug the SD card every time, you must first disconnect the power supply

## 7、 Trouble shooting

**Question 1:** After power, the T-1000S ERROR indicator has been flashing without display output

**Answer:** The ERROR indicator has been flashing means the controller did not read the card correctly, possible problems:

SD card is empty, with no effect file. 2The effect file in the SD card and the controller model are not match, please choose correct

controller model in LedEdit and then re-create the effect file \*led. 3SD card did not format to FAT before copy effect files. 4Please check the supply power voltage, the controller can be individually powered to exclude

---

Changing the SD card and then test to exclude the possibility of a bad SD card **Question 2:** The controller is powered on, the indicator is normal, but no effect change in lighting

**Answer:** The reasons for this are as follows:

- 1 Check if the lighting's signal line and the controller connected correctly
- 2 If the TTL signal is received, the lamp and the controller must be common ground, that means connect the lighting's and the controller's ground together
- 3 Check if the model chose during making display files on the SD card match the chips used in the lighting