




## LTECH Wireless receiver R4-5A

WiFi-104 is a versatile office/home lighting control system. Through WiFi function build-in mobile devices could control various types of LED lighting products after installing related software on our ios or Android phones, tablet PCs and other mobile devices. It makes the led lighting control more intelligence, networking and humanization. WiFi-104 lighting control system integrated with four functional controls including dimming, color temperature adjusting, RGB and RGBW, which could be set as single color, color temperature (nature white+warm white and nature white+warm white+cool white), RGB and RGBW five types. It can simply control various of led lightings which has installed on WiFi software. Meanwhile, it supports max 12 zones control.

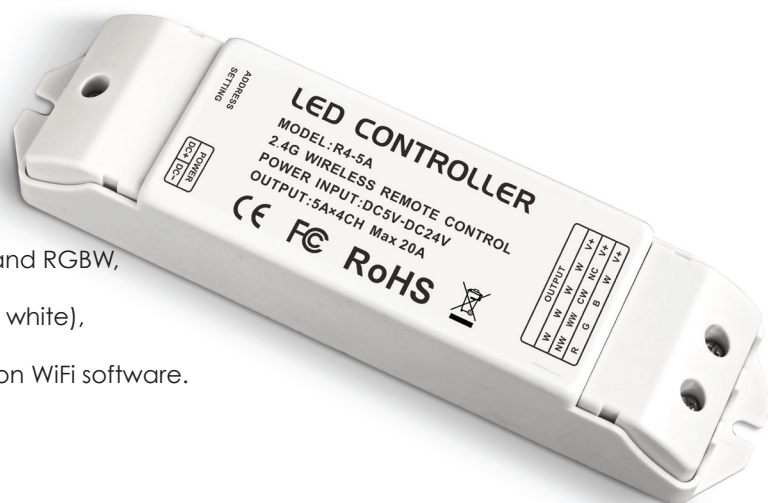

### R4-5A

Working Frequency	2.4GHz
Input voltage	DC5V~DC24V
Max current load	5A x4CH Max 20A
Max output power	100W/240W/480W
Remote Distance	50m
Working temperature	-30°C~55°C
Dimensions	L175×W44×H30mm
Package Size	L178×W48×H33mm
Weight (G.W.)	150g



1) Connect to the zones controller and LED lamps (the same way of WiFi-104 connection)

[Note]: WiFi-104 default to first zone, Master controller can choose whether connecting to LED lamps or not. If not, use wireless control to instead of the first zone.

Multiple partitions can be set to the same type or several types, such as all partitions are single color, can be set to DIM dimmer light type, such as dimmer, color temperature, RGB, and other types of lamps, different partition set to different types of lamps, the lamps connection diagram as follows:

